

R.W. LYALL

All-Flex Risers for Fast, Easy Hookups

Ideal for Both Natural Gas & Propane Riser Applications

One Continuous PE Pipe Service, From Service Main or LP-Tank to Home.

Benefits

- Easy, quick assembly with pipe or crescent wrench
- Leak resistant Service Adapter design
- Self seating design reduces need for torque measurement
- Reduces assembly labor and eliminates need for costly welding or fusing equipment
- Rust & Corrosion resistance - The internal & external surfaces of the Service Head Adapter are zinc plated for long lasting protection.
- UV protected - Flexible case is made from a durable, sunlight resistant material.
- Available in standard lengths of 36" or 48" home or yard appliance connections, and 84" ideal for one continuous line from the LP tank (first-stage regulator) to below ground service.

Specifications

- The Steel to PE joint meets the requirements of ASTM F1948.
- The flex tubing meets the requirements of section 4.2.2 of ASTM F1973.
- The joint between flex tubing and service head adapter meets the requirements of section 6.11 of ASTM F1973.
- Listed with IAPMO/UPC.

Service Head Adapter Flexible Risers



Lyall Service Head Adapter Flexible Risers

3 Basic Sets for Fast & Easy Hookups



For complete instructions installing this product, please refer to the Lyall Service Head Adapter Riser installation guide (RWL DOC # LIT-SHAFCINST-xx).

Lyall Service Head Adapter Flexible Risers come to you in kit form, ready for installation. Each kit includes the proper all-flex, UV protected casing and the Service Head Adapter that you need for fast and easy field assemblies. Casing bend Radius - The flex casing specification for maximum bend radius before damage incurs far exceeds the maximum or recommended bend radius of the PE pipe itself.



Lyall Service Head Adapters are available in several Steel to PE pipe size combinations, including:

Steel thread: 1/2, 3/4, and 1" NPT sizes¹

PE Pipe: 1/2 cts/ips, 3/4 cts/ips, and 1 cts sizes¹

Lyall Service Head Adapter Flexible Risers come in lengths and sizes for all your application needs:

- 36" and 48" lengths are ideal for Natural Gas or Propane home service and yard appliance connections.
- 84" lengths are ideal for above ground LP-Tank applications where you need a fully enclosed, non-rusting protection sleeve running from the first-stage regulator to the underground service line.

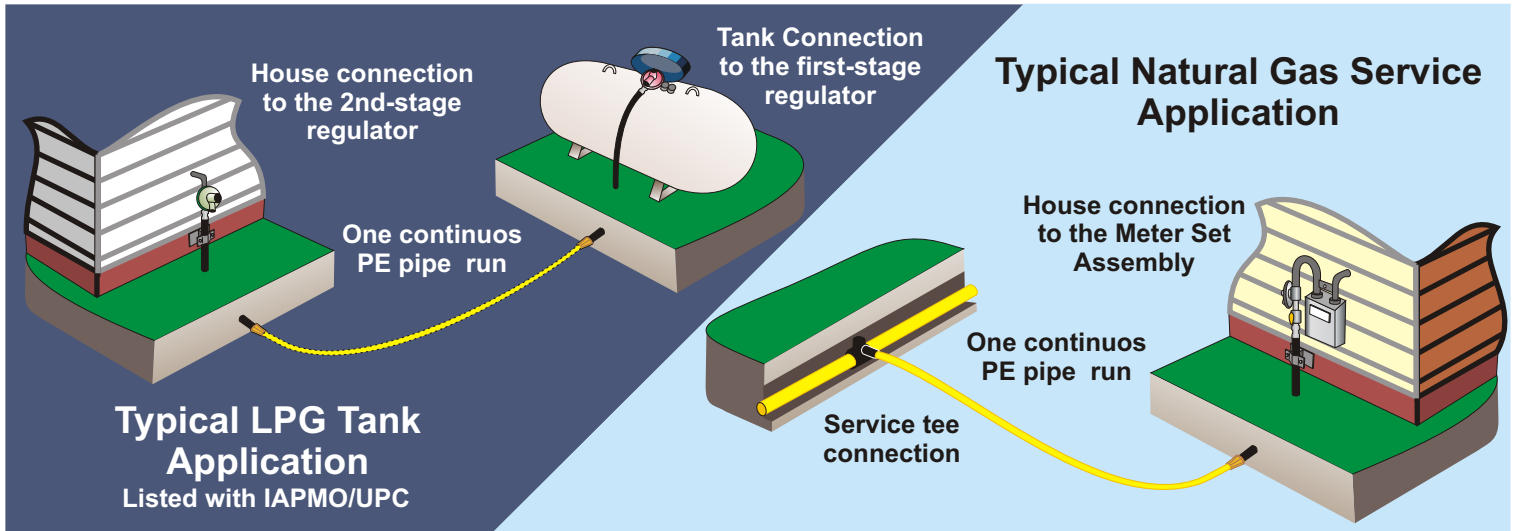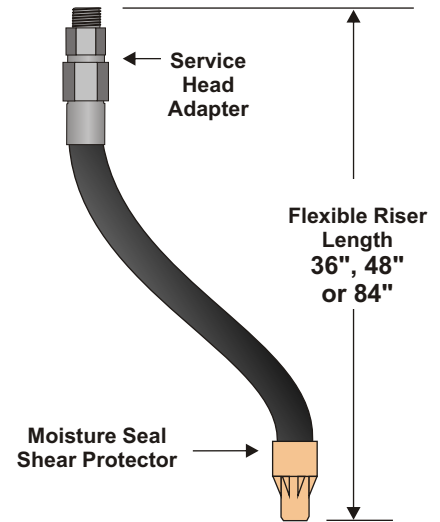

¹ Please contact your Lyall representative for the current size, price, and availability.

Distributed By::



Manufactured by:
R.W. Lyall & Company, Inc.

LYALL Phone: (800) 535-9255 • Fax: (951) 270-1600 • web-site www.rwlyall.com

Lyall and Lyall logo are registered trademarks of R. W. Lyall & Company, Inc

RWL Doc# LIT-SHAFRDS-1E
© 2006 R. W. Lyall & Company, Inc.