




LYALL TRANSITION (ANODE) RISERS (TMR)

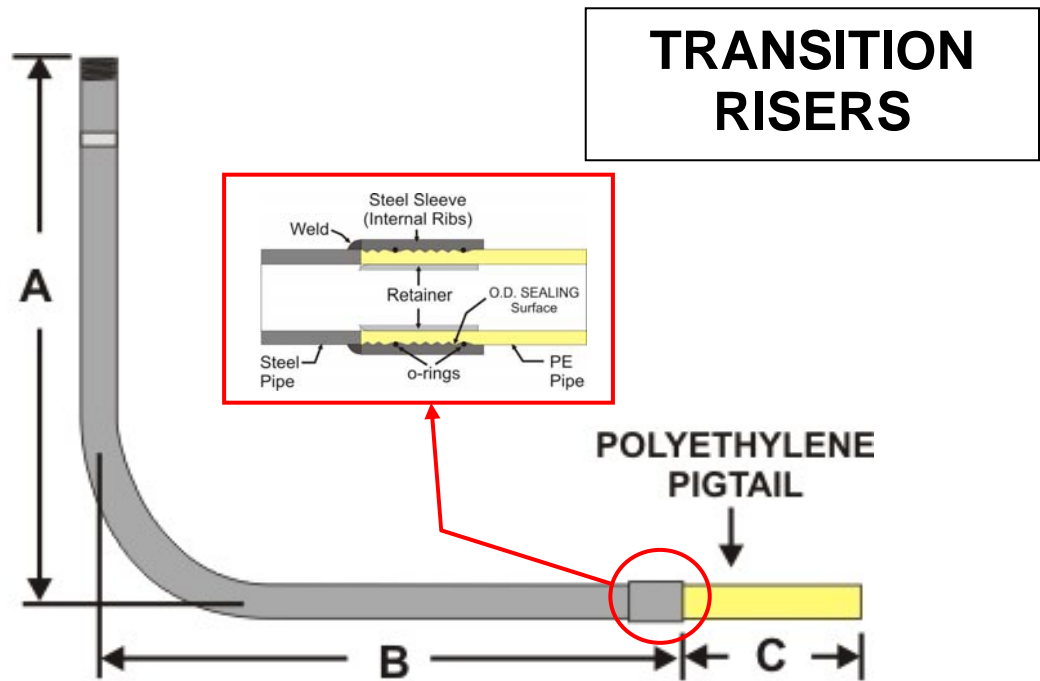

TRANSITION RISERS

TRANSITION RISERS (TMR)				TMR Product Code		
SIZE / DIMENSIONS		Vert "A"	Horz "B"	PE "C"		
Steel	PE Pipe					
PRE-BENT RISERS						
3/4" NPT	X 3/4 IPS SDR 11 PE2406/2708	30"	30"	6"	201051050830	†‡
1" NPT	X 1 IPS SDR 11 PE2406/2708	24"	36"	6"	201321320820	†‡
1" NPT	X 1 IPS SDR 11 PE2406/2708	30"	30"	6"	201321320830	†‡
1" NPT	X 1 IPS SDR 11 PE3408 (BLK)	36"	24"	6"	201321321810	†‡
1-1/4" NPT	X 1-1/4 IPS SDR 10 PE2406/2708	30"	30"	6"	201661660730	†‡
1-1/2" NPT	X 1-1/2 IPS SDR 11 PE2406/2708	30"	30"	6"	201901900830	‡
2" NPT	X 2 IPS SDR 11 PE2406/2708	30"	30"	6"	202382380830	‡
STRAIGHT RISERS						
3" NPT	X 3 IPS SDR 11.5 PE2406/2708	30"	-----	12"	203503500930	
4" NPT	X 4 IPS SDR 11.5 PE2406/2708	30"	-----	12"	204504500930	

Note: Transition Risers require an attached anode buried below ground to protect the casing from corrosion.

For sizes not listed, contact R.W. Lyall & Company or Mechanical Specialties, a division of Lyall.

Recommended accessories: Lyall Riser Wall Brackets, Stakes and Protector Sleeves

† = CSA Approved / ‡ = IAPMO/UPC Listed

CUSTOMER SERVICE: (800) 535-9255 • Web site: www.rwlyall.com

The products listed on this page only represent the most commonly used sizes and configurations. Please contact your local Lyall representative or a Lyall Customer Service representative for additional sizes, customized configurations and available options.