

LYCOFIT[®]

MECHANICAL TAPPING TEES

Service Saddle Sizes

1-1/4", 2", 3", 4", and 6" IPS

- Clean installations – No fusion equipment required
- Safe, economical and maintenance free
- New LycoRoto-Loc gripping Technology
- Excellent durability – resistance to harsh chemicals and cracking
- Taps live lines for fast, easy service
- Retains PE pipe coupon



*More Products,
More Innovation,
Better Service*

LYCOFIT[®]

MECHANICAL TAPPING TEES

FEATURES

- Molded from Rilsan[®] 11 for excellent resistance to fatigue, stress cracking, abrasion, harsh chemicals, and moisture absorption.
- Superior cost savings over fusion or other conventional methods.
- No specialized equipment, power source, or training is required for safe and reliable connections.
- Complete service connection can be performed on live service mains.
- All connecting hardware is stainless steel for long term corrosion resistance.
- Internal cutter makes a clean cut into the PE main. Punched "coupon" is retained in the cutter to prevent entrance into the piping system.
- Low profile design helps reduce stress during installation and backfill operations.
- LYCOFIT[®] Mechanical Tapping Tees are locked reliably in place with the latest LycoRoto-loc pipe gripping technology.
- LYCOFIT[®] Mechanical Tapping Tees with LYCO[®] Excess Flow Valves are available for additional cost savings.


SPECIFICATIONS

- Complies to Code of Federal Regulations Part 192.
- Meets or exceeds ASTM Specifications.
- ASTM D 2513 Standard Specification for Thermoplastic Gas Pressure Pipe, Tubing, and Fittings.
- ASTM F 1924 Standard Specification for Plastic Mechanical Fittings for use on Outside Diameter Controlled Polyethylene Gas Distribution Pipe and Tubing.
- CSA B137.4 Polyethylene Piping Systems for Gas Services.
- Service Temp. -20°F (-29C) to 140°F (60C).
- The LYCOFIT[®] Tapping Tee has been designed to exceed the pressure rating of the PE pipe on which it is designed to be installed.

AVAILABLE SIZES

Inlet (Main) Sizes		Outlet (Service) Sizes	
1-1/4	IPS	1/2	CTS
2	IPS	1	CTS
3	IPS	1-1/4	CTS
4	IPS	1/2	IPS
6	IPS	3/4	IPS
		1	IPS

Metric outlet sizes are available

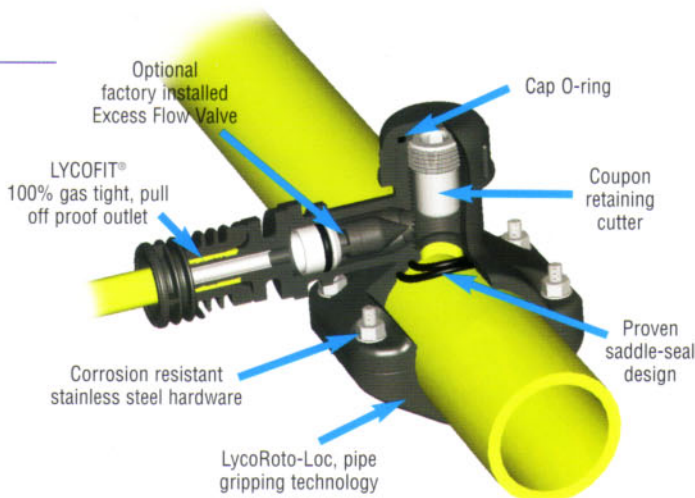

OTHER FINE LYALL PRODUCTS

- Lyall Anodeless Risers
- Lyall Transition Risers
- LYCOFIT[®] Mechanical Fittings
- Lyall Excess Flow Valves
- LYCOFAST[®] Meter Set Assemblies
- Lyall Commercial Meter Sets
- Lyall Industrial Meter Sets and Spools
- Lyall Transition Fittings

YOUR COMPLETE GAS PIPING SOURCE



R. W. Lyall & Co., Inc.
 2665 Research Drive
 Corona, CA 92882-6918
 (800) 535-9255
 (951) 270-1600 (FAX)